




Stellar 1N+ Dual-glass Bifacial 635W-660W

 **Higher Power**
Lower LCOE

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  PFAS-free



660W

Output

24.4%

Efficiency



≤1%

First-year Degradation

≤0.35%

Annual Degradation from Year 2-30

30-year Linear Performance Warranty

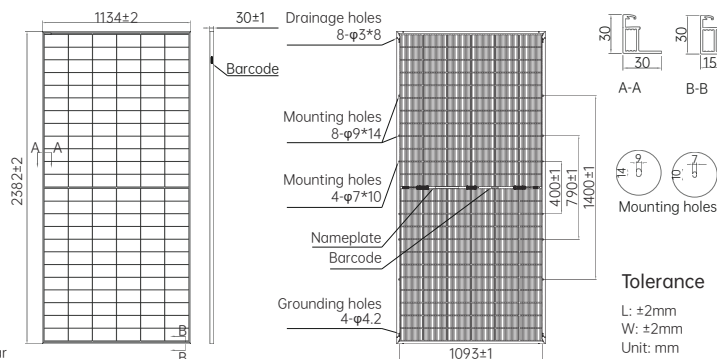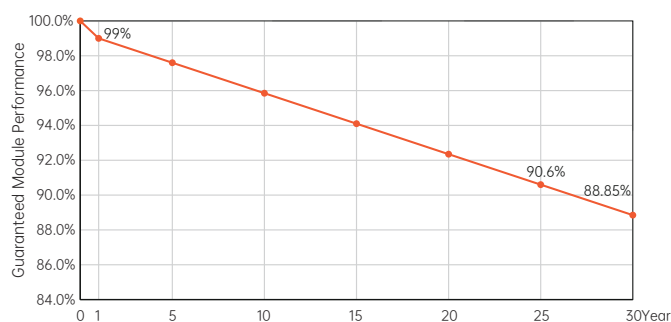

Electrical Characteristics (STC: AM1.5 1000W/m ² 25°C NOCT: AM1.5 800W/m ² 20°C 1m/s)												Power Tolerance:0~ +3%	
Module Type	AIKO-G635-MCH72Dw		AIKO-G640-MCH72Dw		AIKO-G645-MCH72Dw		AIKO-G650-MCH72Dw		AIKO-G655-MCH72Dw		AIKO-G660-MCH72Dw		
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
P _{max} [W]	635	478	640	482	645	486	650	490	655	493	660	497	
V _{oc} [V]	54.20	51.18	54.40	51.28	54.40	51.37	54.50	51.47	54.60	51.56	54.70	51.66	
V _{mp} [V]	45.01	42.51	45.11	42.60	45.21	42.70	45.31	42.79	45.41	42.89	45.51	42.99	
I _{sc} [A]	14.90	12.05	14.96	12.10	15.02	12.15	15.08	12.20	15.14	12.24	15.20	12.29	
I _{mp} [A]	14.11	11.26	14.19	11.33	14.27	11.39	14.35	11.46	14.43	11.51	14.51	11.57	
Module Efficiency	23.5%		23.7%		23.9%		24.1%		24.2%		24.4%		

Mechanical Specification

Bifacial Factor	70±5%
Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm Heat Strengthened Glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) +350mm, -280mm/±1400mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68,3 bypass diodes
Connector	MC4 compatible/MC4-Evo2
Weight	33.5kg±3%
Dimension	2382*1134*30mm
Package Detail	36pcs per pallet / 144pcs per 20'GP / 720pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C

